

Access Service

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

TABLE OF CONTENTS

Sheet No.

15.1 LOCAL TRANSPORT INTERFACE GROUPS.....	1
15.1.1 INTERFACE GROUP 1.....	1
15.1.2 INTERFACE GROUP 2.....	2
15.1.3 INTERFACE GROUP 3.....	2
15.1.4 INTERFACE GROUP 4.....	3
15.1.5 INTERFACE GROUP 5.....	3
15.1.6 INTERFACE GROUP 6.....	4
15.1.7 INTERFACE GROUP 7.....	4
15.1.8 INTERFACE GROUP 8.....	5
15.1.9 INTERFACE GROUP 9.....	5
15.1.10 INTERFACE GROUP 10.....	6
15.1.11 AVAILABLE PREMISE INTERFACE CODES.....	6
15.1.12 SUPERVISORY SIGNALING.....	9
15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE.....	10
15.2.1 STANDARD TRANSMISSION SPECIFICATIONS.....	10
A. TYPE A TRANSMISSION SPECIFICATIONS.....	10
B. TYPE B TRANSMISSION SPECIFICATIONS.....	12
C. TYPE C TRANSMISSION SPECIFICATIONS.....	14
15.2.2 DATA TRANSMISSION PARAMETERS.....	16
A. DATA TRANSMISSION PARAMETERS TYPE DA.....	16
B. DATA TRANSMISSION PARAMETERS TYPE DB.....	17
15.3. SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES....	19
15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS.....	19
15.3.2 IMPEDANCE.....	24
15.3.3 DIGITAL HIERARCHY CHANNEL INTERFACE CODES.....	25
15.3.4 SERVICE DESIGNATOR/NETWORK CHANNEL CODE CONVERSION TABLE....	26
15.3.5 COMPATIBLE CHANNEL INTERFACES.....	29
C. VOICE GRADE.....	29
D. PROGRAM AUDIO.....	38
E. VIDEO.....	39
F. DIGITAL DATA.....	40
G. HIGH CAPACITY.....	40

(C)
(C)
(D)
(D)

Issued: NOV 19 1992

Issued by
R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. 1637

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

Interface Group 1 is provided with Type C Transmission Specifications, and Interface Groups 2 through 10 are provided with Type A or B Transmission Specifications, depending on the Feature Group, or type of Wireless Interconnection Service and whether the Access Service is routed directly or through an access tandem. All Interface Groups are provided with Data Transmission Parameters. (T)

Only certain premises interfaces are available at the customer designated premises. The premises interfaces associated with the Interface Groups may vary among Feature Groups. The various premises interfaces which are available with the Interface Groups, and the Feature Groups with which they may be used, are set forth in C15.1 following. (T)

15.1.1 INTERFACE GROUP 1 (USOC TPPIX)

Interface Group 1, except as set forth in the following, provides two-wire voice frequency transmission at the point of termination at the customer's premises. The interface is capable of transmission of voice and associated telephone signals within the frequency bandwidth of approximately 300 to 3000 Hz.

Interface Group 1 is not provided in association with FGC, FGD or Wireless Interconnection Service when the first point of switching is an access tandem. In addition, Interface Group 1 is not provided in association with FGB, FGC, FGD or Wireless Interconnection Service when the first point of switching provides only four-wire terminations. (T)

The transmission path between the point of termination at the customer designated premises and the first point of switching may be comprised of any form or configuration of plant capable of and typically used in the telecommunications industry for the transmission of voice and associated telephone signals within the frequency bandwidth of 300 to 3000 Hz. (T)

The interface is provided with loop supervisory signaling. When the interface is associated with FGA or Type 1 Wireless Interconnection Service, such signaling will be loop start or ground start signaling. When the interface is associated with FGB, FGC, FGD or Wireless Interconnection Service, such signaling, except for two-way calling which is E&M signaling, will be reverse battery signaling. (T)

Issued: **SEP 27 1991**

Issued by:
R. C. Blanz
President

Effective:

Advice No. **1597**

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

15.1.2 INTERFACE GROUP 2 (USOC TPP2X)

Interface Group 2 provides four-wire voice frequency transmission at the point of termination at the customer designated premises. The interface is capable of transmission of voice and associated telephone signals within the frequency bandwidth of approximately 300 to 3000 Hz.

The transmission path between the point of termination at the customer designated premises and the first point of switching may be comprised of any form or configuration of plant capable of and typically used in the telecommunications industry for the transmission of voice and associated telephone signals within the frequency bandwidth of 300 to 3000 Hz.

The interface is provided with loop supervisory signaling. When the interface is associated with FGA or Type 1 Wireless Interconnection Service, such signaling will be loop start or ground start signaling. When the interface is associated with FGB, FGC, FGC or Wireless Interconnection Service, such signaling, except for two-way calling which is E&M signaling, will be reverse battery signaling.

(T)
(T)

15.1.3 INTERFACE GROUP 3 (USOC TPP3X)

Interface Group 3 provides group level analog transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals between the frequencies of 60 to 108 kHz, with the capability to channelize up to 12 voice frequency transmission paths. Certain frequencies within the bandwidth of the Interface Group are reserved for Utility use, e.g., pilot and carrier group alarm tones. Before the first point of switching, the Utility will provide multiplex equipment to derive 12 transmission paths of frequency bandwidth of approximately 300 to 3000 Hz.

The interface is provided with individual transmission path SF supervisory signaling.

Issued: SEP 27 1991

Issued by:
R. C. Blanz
President

Effective:

FEB 24 1992

Advice No. 1597

REGISTRATION
NEVADA

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

15.1.4 INTERFACE GROUP 4 (USOC TPP4X)

Interface Group 4 provides supergroup level analog transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals between the frequencies of 312 to 552 kHz, with the capability to channelize up to 60 voice frequency transmission paths. Certain frequencies within the bandwidth of the Interface Group are reserved for Utility use, e.g., pilot and carrier group alarm tones. Before the first point of switching, the Utility will provide multiplex and channel bank equipment to derive 60 transmission paths of frequency bandwidth of approximately 300 to 3000 Hz.

The interface is provided with individual transmission path SF supervisory signaling.


15.1.5 INTERFACE GROUP 5 (USOC TPP5X)

Interface Group 5 provides mastergroup level analog transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals between the frequencies of 564 to 3084 kHz, with the capability to channelize up to 600 voice frequency transmission paths. Certain frequencies within the bandwidth of the Interface Group are reserved for Utility use, e.g., pilot and carrier group alarm tones. Before the first point of switching, the Utility will provide multiplex and channel bank equipment to derive 600 transmission paths of frequency bandwidth of approximately 300 to 3000 Hz.

The interface is provided with individual transmission path SF supervisory signaling.

Issued: **MAR 25 1987**
Effective: APR 1 1987
Advice No. **1459**

Issued by
R. K. Van Allen
President

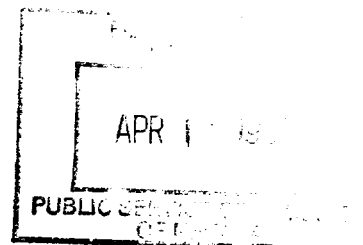

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

15.1.6 INTERFACE GROUP 6 (USOC TPP6X)

Interface Group 6 provides DS1 level digital transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals at a nominal 1.544 Mbps, with the capability to channelize up to 24 voice frequency transmission paths. Before the first point of switching, when analog switching utilizing analog terminations is provided, the Utility will provide multiplex and channel bank equipment to derive 24 transmission paths of a frequency bandwidth of approximately 300 to 3000 Hz. When digital switching or analog switching with digital carrier terminations is provided, the Utility will provide, at the first point of switching, a DS1 signal in D3/D4 format.

The interface is provided with individual transmission path bit stream supervisory signaling.

(A) (USOC SLKS7)

Interface Group 6, used in conjunction with SS7, provides interconnection for common channel signaling access capability.

(N)
|
(N)

15.1.7 INTERFACE GROUP 7 (USOC TPP7X)

Interface Group 7 provides DS1C level digital transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals at a nominal 3.152 Mbps, with the capability to channelize up to 48 voice frequency transmission paths. Before the first point of switching, when analog switching utilizing analog terminations is provided, the Utility will provide multiplex and channel bank equipment to derive up to 48 voice frequency transmission paths of a frequency bandwidth of approximately 300 to 3000 Hz. When digital switching or analog switching with digital carrier terminations is provided, the Utility will provide, at the first point of switching, DS1 signal in D3/D4 format.

The interface is provided with individual transmission path bit stream supervisory signaling.

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

15.1.8 INTERFACE GROUP 8 (USOC TPP8X)

Interface Group 8 provides DS2 level digital transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals at a nominal 6.312 Mbps, with the capability to channelize up to 96 voice frequency transmission paths. Before the first point of switching, when analog switching utilizing analog terminations is provided, the Utility will provide multiplex and channel bank equipment in its office to derive up to 96 transmission paths of a frequency bandwidth of approximately 300 to 3000 Hz. When digital switching or analog switching with digital carrier terminations is provided, the Utility will provide, at the first point of switching, DS1 signal in D3/D4 format.

The interface is provided with individual transmission path bit stream supervisory signaling.

15.1.9 INTERFACE GROUP 9 (USOC TPP9X)

Interface Group 9 provides DS3 level digital transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals at a nominal 44.736 Mbps, with the capability to channelize up to 672 voice frequency transmission paths. Before the first point of switching, when analog switching utilizing analog terminations is provided, the Utility will provide multiplex and channel bank equipment to derive up to 672 transmission paths of a frequency bandwidth of approximately 300 to 3000 Hz. When digital switching, or analog switching with digital carrier terminations is provided, the Utility will provide, at the first point of switching, DS1 signal in D3/D4 format.


The interface is provided with individual transmission path bit stream supervisory signaling.

Issued: **MAR 25 1987**

Issued by
R. K. Van Allen
President

Effective: **APR 1 1987**

Advice No. **1459**

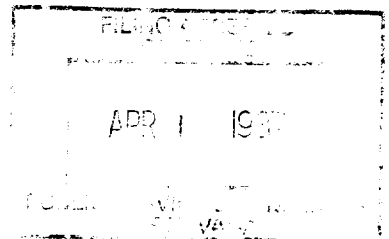

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS

15.1.10 INTERFACE GROUP 10 (USOC TPPAX)

Interface Group 10 provides DS4 level digital transmission at the point of termination at the customer designated premises. The interface is capable of transmitting electrical signals at a nominal 274.176 Mbps, with the capability to channelize up to 4032 voice frequency transmission paths. Before the first point of switching, when analog switching utilizing analog terminations is provided, the Utility will provide multiplex and channel bank equipment to derive up to 4032 transmission paths of a frequency bandwidth of approximately 300 to 3000 Hz. When digital switching or analog switching with digital carrier terminations is provided, the Utility will provide, at the first point of switching, DS1 signal in D3/D4 format. The interface is provided with individual transmission path bit stream supervisory signaling.

15.1.11 AVAILABLE PREMISES INTERFACE CODES

Following is a matrix showing, for each Interface Group, which premises interface codes are available as a function of the Utility switch supervisory signaling and Feature Group. For explanations of these codes, see the Glossary of Channel Interface Codes in C15.3.1 following.


(T)

Issued: JAN 30 1989

Issued by
D. R. Mulkey
President

Effective:

Advice No. 1526

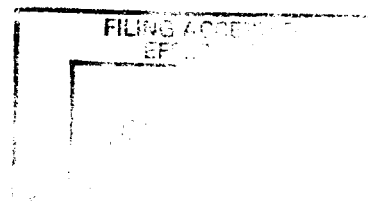

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS (Cont'd)

15.1.11 AVAILABLE PREMISES INTERFACE CODES (Cont'd)

Interface Group	Utility Switch Supervisory Signaling	Premises Interface Code	Feature Group				Wireless Interconnection	(N)
			A	B	C	D		
1	LO	2LS2	X				X	(N)
	LO	2LS3	X				X	
	GO	2GS2	X				X	
	GO	2GS3	X				X	
	LO, GO	2DX3	X				X	
	LO, GO	4EA3-E	X					
	LO, GO	4EA3-M	X					
	LO, GO	6EB3-E	X					
	LO, GO	6EB3-M	X					
	RV, EA, EB, EC	2DX3		X	X	X	X	
	RV, EA, EB, EC	4EA3-E		X	X	X		
	RV, EA, EB, EC	4EA3-M		X	X	X		
	RV, EA, EB, EC	6EB3-E		X	X	X		
	RV, EA, EB, EC	6EB3-M		X	X	X		
	EA, EB, EC	6EC3			X	X		
	RV	2RV3-0		X	X	X	X	(N)
	RV	2RV3-T		X	X	X	X	(N)
	2	LO, GO	4SF2	X				
		LO, GO	4SF3	X				
		LO	4LS2	X				
LO		4LS3	X					
LO		6LS2	X					
GO		4GS2	X					
GO		4GS3	X					
GO		6GS2	X					
LO, GO		4DX2	X					
LO, GO		4DX3	X					
LO, GO		6EA2-E	X					
LO, GO		6EA2-M	X					
LO, GO		8EB2-E	X					
LO, GO		8EB2-M	X					
LO, GO	6EX2-B	X						

Issued: SEP 27 1991

Issued by:
 R. C. Blanz
 President

Effective:

Advice No. 1597

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS (Cont'd)
 15.1.11 AVAILABLE PREMISES INTERFACE CODES (Cont'd)

Interface Group	Utility Switch Supervisory Signaling	Premises Interface Code	Feature Group				Wireless Interconnection	(N)
			A	B	C	D		
2 (Cont'd)	RV, EA, EB, EC	4SF2	X	X	X		X	(N)
	RV, EA, EB, EC	4SF3	X					
	RV, EA, EB, EC	4DX2	X	X	X		X	(N)
	RV, EA, EB, EC	4DX3	X					
	RV, EA, EB, EC	6DX2			X			
	RV, EA, EB, EC	6EA2-E	X	X	X		X	(N)
	RV, EA, EB, EC	6EA2-M	X	X	X		X	
	RV, EA, EB, EC	8EB2-E	X	X	X		X	
	RV, EA, EB, EC	8EB2-M	X	X	X		X	
	EA, EB, EC	8EC2-M			X	X	X	
	RV	4RV2-O	X	X	X		X	
	RV	4RV2-T	X	X	X		X	(N)
	RV	4RV3-O	X	X				
	RV	4RV3-T	X	X				
3	LO, GO	4AH5-B	X					
	RV, EA, EB, EC	4AH5-B		X	X	X		
4	LO, GO	4AH6-C	X					
	RV, EA, EB, EC	4AH6-C		X	X	X		
5	LO, GO	4AH6-D	X					
	RV, EA, EB, EC	4AH6-D		X	X	X		
6	LO, GO	4DS9-15	X				X	(N)
	LO, GO	4DS9-15L	X					
	RV, EA, EB, EC	4DS9-15		X	X	X	X	(N)
	RV, EA, EB, EC	4DS9-15L		X	X	X		
7	LO, GO	4DS9-31	X					
	RV, EA, EB, EC	4DS9-31		X	X	X		
	LO, GO	4DS9-31L	X					
	RV, EA, EB, EC	4DS9-31L		X	X	X		

Issued: **SEP 27 1991**

Issued by:
 R. C. Blanz
 President

Effective:

Advice No. **1597**

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.1 LOCAL TRANSPORT INTERFACE GROUPS (Cont'd)
 15.1.11 AVAILABLE PREMISES INTERFACE CODES (Cont'd)

Interface Group	Utility Switch Supervisory Signaling	Premises Interface Code	Feature Group				Wireless Interconnection (N)
			A	B	C	D	
8	LO, GO	4DS0-63	X				
	LO, GO	4DS0-63L	X				
	RV, EA, EB, EC	4DS0-63		X	X	X	
	RV, EA, EB, EC	4DS0-63L		X	X	X	
9	LO, GO	4DS6-44	X				
	LO, GO	4DS6-44L	X				
	RV, EA, EB, EC	4DS6-44		X	X	X	
	RV, EA, EB, EC	4DS6-44L		X	X	X	
10	LO, GO	4DS6-27	X				
	LO, GO	4DS6-27L	X				
	RV, EA, EB, EC	4DS6-27		X	X	X	
	RV, EA, EB, EC	4DS6-27L		X	X	X	

15.1.12 SUPERVISORY SIGNALING

For Interface Groups 1 and 2

DX Supervisory Signaling.
 E&M Type I Supervisory Signaling,
 E&M Type II Supervisory Signaling, or
 E&M Type III Supervisory Signaling

For Interface Group 2

SF Supervisory Signaling, or
 Tandem Supervisory Signaling

For Interface Groups 6 and 10

These Interface Groups may, at the option of the customer, be provided with individual transmission path SF supervisory signaling where such signaling is available in Utility central offices. Generally such signaling is available only where the entry switch provides an analog, i.e., nondigital, interface to the transport termination.

Issued: **SEP 27 1991**

Issued by:
 R. C. Blanz
 President

Effective:

Advice No. **1597**

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS

Following are descriptions of the three Standard Transmission Specifications available with Switched Access Service Feature Groups. The specific applications in terms of the Feature Groups and Interface Groups with which the Feature Group Standard Transmission Specifications are provided as set forth in C6.2.1.C, C6.2.2.C, C6.2.3.C and C6.2.4.C preceding.

A. TYPE A TRANSMISSION SPECIFICATIONS

Type A Transmission Specifications are provided with the following parameters:

1. Loss Deviation

The maximum Loss Deviation of the 1004 Hz loss relative to the Expected Measured Loss (EML) is + 2.0 dB

2. Attenuation Distortion

The maximum Attenuation Distortion in the 404 to 2804 Hz frequency band relative to the loss at 1004 Hz is -1.0 dB to + 3.0 dB.


3. C-Message Noise

The maximum C-Message Noise for the transmission path at the route miles listed is less than or equal to:

<u>Route Miles</u>	<u>C-Message Noise</u>
less than 50	32 dBrnC0
51 to 100	34 dBrnC0
101 to 200	37 dBrnC0
201 to 400	40 dBrnC0
401 to 1000	42 dBrnC0

Issued: **MAR 25 1987**
Effective: **APR 1 1987**
Advice No. **1459**

Issued by
R. K. Van Allen
President

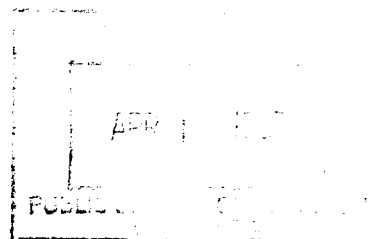

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS (Cont'd)

A. TYPE A TRANSMISSION SPECIFICATIONS (Cont'd)

4. C-Notch Noise

The maximum C-Notch Noise, utilizing a -16 dBm0 holding tone, is less than or equal to 45 dBrnC0.

5. Echo Control

Echo Control, identified as Equal Level Echo Path Loss, and expressed as Echo Return Loss and Singing Return Loss, is dependent on the routing, i.e., whether the service is routed directly from the customer's point of termination (POT) to the end office or via an access tandem. It is equal to or greater than the following:

	<u>Echo Return Loss</u>	<u>Singing Return Loss</u>
POT to Access Tandem	21 dB	14 dB
POT to End Office		
Direct	N/A	N/A
Via Access Tandem	16 dB	11 dB


6. Standard Return Loss

Standard Return Loss expressed as Echo Return Loss and Singing Return Loss on two-wire ports of a four-wire point of termination shall be equal to or greater than:

<u>Echo Return Loss</u>	<u>Singing Return Loss</u>
5 dB	2.5 dB

Issued: **MAR 25 1987**
Effective: **APR 1 1987**
Advice No. **1458**

Issued by
R. K. Van Allen
President

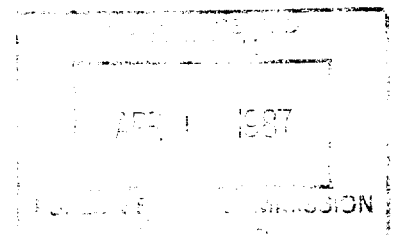

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS (Cont'd)

B. TYPE B TRANSMISSION SPECIFICATIONS

Type B Transmission Specifications are provided with the following parameters:

1. Loss Deviation

The maximum Loss Deviation of the 1004 Hz loss relative to the Expected Measured Loss (EML) is + 2.5 dB.

2. Attenuation Distortion

The maximum Attenuation Distortion in the 404 to 2804 Hz frequency band relative to loss at 1004 Hz is -2.0 dB to +4.0 dB.

3. C-Message Noise

The maximum C-Message Noise for the transmission path at the route miles listed is less than or equal to:

<u>Route Miles</u>	<u>C-Message Noise¹</u>	
	<u>Type B1</u>	<u>Type B2</u>
less than 50	32 dBrnC0	35 dBrnC0
51 to 100	33 dBrnC0	37 dBrnC0
101 to 200	35 dBrnC0	40 dBrnC0
201 to 400	37 dBrnC0	43 dBrnC0
401 to 1000	39 dBrnC0	45 dBrnC0

4. C-Notch Noise

The maximum C-Notch Noise, utilizing a -16 dBm0 holding tone is less than or equal to 47 dBrnC0.

NOTE 1: For Feature Groups C and D only Type B2 will be provided. For Feature groups A and B, Type B1 or B2 will be provided as set forth in Technical Reference TR-NPL-000334.


(C)

Issued: JAN 30 1989

Effective:

Advice No. 1526

Issued by
D. R. Mulkey
President

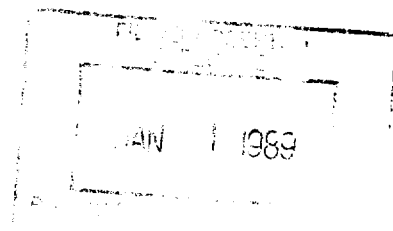

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS (Cont'd)

B. TYPE B TRANSMISSION SPECIFICATIONS (Cont'd)

5. Echo Control

Echo Control, identified as Impedance Balance for FGA and FGB and Equal Level Echo Path Loss for FGC and FGD, and expressed as Echo Return Loss (ERL) and Singing Return Loss (SRL), is dependent on the routing, i.e., whether the service is routed directly from the customer's Point of Termination (POT) to the end office or via an access tandem. The ERL and SRL also differ by Feature Group, type of termination, and type of transmission path. They are greater than or equal to the following:


	<u>Echo Return Loss</u>	<u>Singing Return Loss</u>
POT to Access Tandem		
Terminated in		
4-Wire trunk	21 dB	14 dB
Terminated in		
2-Wire trunk	16 dB	11 dB
POT to End Office		
Direct	16 dB	11 dB
Via Access Tandem		
For FGB access	8 dB	4 dB
For FGC access		
(Effective		
4-Wire trans-		
mission path		
at end office)		
For FGC access	16 dB	11 dB
(Effective		
2-Wire trans-		
mission path		
at end office)	13 dB	6 dB

Issued: **MAR 25 1987**

Effective: **APR 1 1987**

Advice No. **1459**

Issued by
R. K. Van Allen
President



ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS (Cont'd)

B. TYPE B TRANSMISSION SPECIFICATIONS (Cont'd)

6. Standard Return Loss

Standard Return Loss, expressed as Echo Return Loss and Singing Return Loss, on two-wire ports of a four-wire point of interface shall be equal to or greater than:

Echo Return Loss

Singing Return Loss

5 dB

2.5 dB

C. TYPE C TRANSMISSION SPECIFICATIONS

Type C Transmission Specifications is provided with the following parameters:

1. Loss Deviation

The maximum Loss Deviation of the 1004 Hz loss relative to the Expected Measured Loss (EML) is + 3.0 dB.

2. Attenuation Distortion

The maximum Attenuation Distortion in the 404 to 2804 Hz frequency band relative to loss at 1004 Hz is -2.0 dB to +5.5 dB.

Issued: **MAR 25 1987**

Effective: **APR 1 1987**

Advice No. **1459**

Issued by
R. K. Van Allen
President

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.1 STANDARD TRANSMISSION SPECIFICATIONS (Cont'd)

C. TYPE C TRANSMISSION SPECIFICATIONS (Cont'd)

3. C-Message Noise

The maximum C-Message Noise for the transmission path at the route miles listed is less than or equal to:

<u>Route Miles</u>	<u>C-Message Noise¹</u>	
	<u>Type C1</u>	<u>Type C2</u>
less than 50	32 dBrnCO	38 dBrnCO
51 to 100	33 dBrnCO	39 dBrnCO
101 to 200	35 dBrnCO	41 dBrnCO
201 to 400	37 dBrnCO	43 dBrnCO
401 to 1000	39 dBrnCO	45 dBrnCO

4. C-Notch Noise

The maximum C-Notch Noise, utilizing a -16 dBm0 holding tone is less than or equal to 47 dBrnCO.

5. Echo Control

Echo Control, identified as Return Loss and expressed as Echo Return Loss and Singing Return Loss is dependent on the routing, i.e., whether the service is routed directly from the customer's Point of Termination (POT) to the end office or via an access tandem. It is equal to or greater than the following:

	<u>Echo Return Loss</u>	<u>Singing Return Loss</u>
POT to Access Tandem	13 dB	6 dB
POT to End Office		
Direct	13 dB	6 dB
Via Access Tandem	8 dB	4 dB
(for FGB only)		


NOTE 1: For Feature Groups C and D only Type C2 will be provided. For Feature Groups A and B, Type C1 or C2 will be provided as set forth in Technical Reference PUB 62500.

Issued: **MAR 25 1987**

Effective: **APR 1 1987**

Advice No. **459**

Issued by
R. K. Van Allen
President

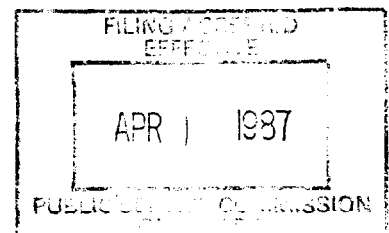

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE

15.2.2 DATA TRANSMISSION PARAMETERS

Two types of Data Transmission Parameters, i.e., Type DA and Type DB, are provided for the Feature Group arrangements. The specific applications in terms of the Feature Groups with which they are provided are set forth in C6.2.1.C., C6.2.2.C., C6.2.3.C., and C6.2.4.C. preceding. Following are descriptions of each.

A. DATA TRANSMISSION PARAMETERS TYPE DA

1. Signal to C-Notched Noise Ratio

The Signal to C-Notched Noise Ratio is equal to or greater than 33 dB.

2. Envelope Delay Distortion

The maximum Envelope Delay Distortion for the frequency bands and route miles specified is:

<u>604 to 2804 Hz</u>	
less than 50 route miles	500 microseconds
equal to or greater than 50 route miles	900 microseconds

<u>1004 to 2404 Hz</u>	
less than 50 route miles	200 microseconds
equal to or greater than 50 route miles	400 microseconds

3. Impulse Noise Counts

The Impulse Noise Counts exceeding a 65 dBrnC0 threshold in 15 minutes is no more than 15 counts.


4. Intermodulation Distortion

The Second Order (R2) and Third Order (R3) Intermodulation Distortion products are equal to or greater than:

Second Order (R2)	33 dB
Third Order (R3)	37 dB

Issued: **MAR 25 1987**
Effective: **APR 1 1987**
Advice No. **459**

Issued by
R. K. Van Allen
President

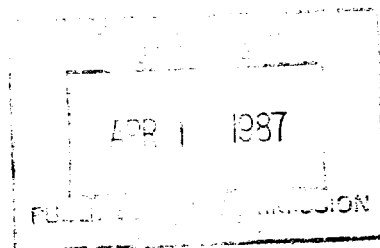

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.2 DATA TRANSMISSION PARAMETERS (Cont'd)

A. DATA TRANSMISSION PARAMETERS TYPE DA (Cont'd)

5. Phase Jitter

The Phase Jitter over the 4-300 Hz frequency band is less than or equal to 5° peak-to-peak.

6. Frequency Shift

The maximum Frequency Shift does not exceed -2 to +2 Hz.

B. DATA TRANSMISSION PARAMETERS TYPE DB

1. Signal to C-Notched Noise Ratio

The signal to C-Notched Noise Ratio is equal to or greater than 30 dB.

2. Envelope Delay Distortion

The maximum Envelope Delay Distortion for the frequency bands and route miles specified is:

<u>604 to 2804 Hz</u>	
less than 50 route miles	800 microseconds
equal to or greater than 50 route miles	1000 microseconds

<u>1004 to 2404 Hz</u>	
less than 50 route miles	320 microseconds
equal to or greater than 50 route miles	500 microseconds

3. Impulse Noise Counts

The Impulse Noise Counts exceeding a 67 dBrnC0 threshold in 15 minutes is no more than 15 counts.


Issued:

MAR 25 1987

Effective: APR 1 1987

Issued by
R. K. Van Allen
President

Advice No. **1450**

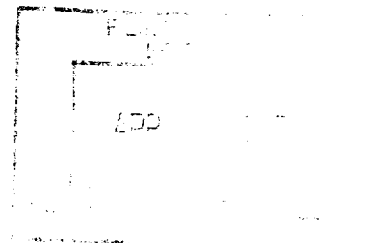

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.2 TRANSMISSION SPECIFICATIONS SWITCHED ACCESS SERVICE (Cont'd)

15.2.2 DATA TRANSMISSION PARAMETERS (Cont'd)

B. DATA TRANSMISSION PARAMETERS TYPE DB (Cont'd)

4. Intermodulation Distortion

The Second Order (R2) and Third Order (R3) Intermodulation Distortion products are equal to or greater than:

Second Order (R2)	31 dB
Third Order (R3)	34 dB

5. Phase Jitter

The Phase Jitter over the 4-300 Hz frequency band is less than or equal to 7° peak-to-peak.

6. Frequency Shift


The maximum Frequency Shift does not exceed -2 to +2 Hz.

Issued: **MAR 25 1987**

Effective: **APR 1 1987**

Advice No. **1459**

Issued by
R. K. Van Allen
President

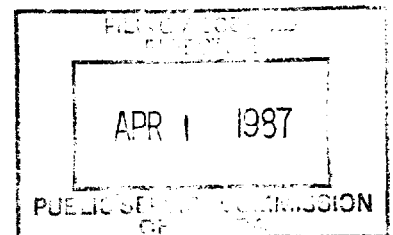

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES

This section explains the Channel Interface codes and Network Channel codes that the customer must specify when ordering Special Access Service. Included is an example which explains the specific characters of the code, a glossary of Channel Interface codes, impedance levels, Network Channel codes and compatible Channel Interfaces.

(D)
|
(D)

15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS

<u>Code</u>	<u>Option</u>	<u>Definition</u>
AB -		accepts 20 Hz ringing signal at customer's point of termination
AC -		accepts 20 Hz ringing signal at customer's end user's point of termination
AH -		analog high capacity interface
	- B	60 Khz to 108 Khz (12 channels)
	- C	312 Khz to 552 Khz (60 channels)
	- D	564 Khz to 3084 Khz (600 channels)
CT -		Centrex Tie Trunk Termination
DA -		data stream in VF frequency band at customer's end user's point of termination
DB -		data stream in VF frequency band at customer's point of termination


(D)
|
(D)

Issued: NOV 19 1992

Issued by
R. C. Blanz
President and Chief Executive Officer

Effective:

Advice No. 1637

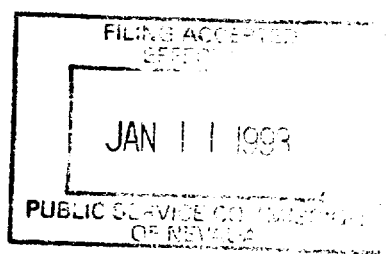

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES


15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)
15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS (Cont'd)

<u>Code</u>	<u>Option</u>	<u>Definition</u>
DD	-	DATAPHONE Select-A-Station (and TABS) interface at customer's point of termination
DE	-	DATAPHONE Select-A-Station (and TABS) interface at the customer's end user's point of termination
DS	-	digital hierarchy interface
	- 15	1.544 Mbps (DS1) format per PUB 41451 plus D4
	- 15E	8-bit PCM encoded in one 64 kbps of the DS1 signal
	- 15F	8-bit PCM encoded in two 64 kbps of the DS1 signal
	- 15G	8-bit PCM encoded in three 64 kbps of the DS1 signal
	- 15H	14/11-bit PCM encoded in six 64 kbps of the DS1 signal
	- 15J	1.544 Mbps format per PUB 41451
	- 15K	1.544 Mbps format per PUB 41451 plus extended framing format
	- 15L	1.544 Mbps (DS1) with SF signaling
	- 27	274.176 Mbps (DS4)
	- 27L	274.176 Mbps (DS4) with SF signaling
	- 31	3.152 Mbps (DSL)
	- 31L	3.152 Mbps (DSL) with SF signaling
	- 44	44.736 Mbps (DS3)
	- 44L	44.736 Mbps (DS3) with SF signaling
	- 63	6.312 Mbps (DS2)
	- 63L	6.312 Mbps (DS2) with SF signaling

(D)
|
(D)

Issued: NOV 19 1992
Effective: President and Chief Executive Officer
Advice No. 1637

Issued by
R. C. Blanz

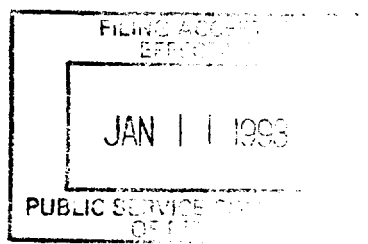

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS (Cont'd)

<u>Code</u>	<u>Option</u>	<u>Definition</u>	
DU -		digital access interface	
-	24	2.4 kbps	
-	48	4.8 kbps	
-	56	56.0 kbps	
-	56A	64.0 kbps	(N)
-	96	9.6 kbps	
-	A	1.544 Mbps format per PUB 41451	
-	B	1.544 Mbps format per PUB 41451 plus D4	
-	C	1.544 Mbps format per PUB 41451 plus extended framing format	
DX -		duplex signaling interface at customer's point of termination	
DY -		duplex signaling interface at customer's end user's point of termination	
EA -	E	Type I E&M Lead Signaling. Customer at POT or customer's end user at POT originates on E Lead.	
EA -	M	Type I E&M Lead Signaling. Customer at POT or customer's end user at POT originates on M Lead.	
EB -	E	Type II E&M Lead Signaling. Customer at POT or customer's end user at POT originates on E Lead.	
EB -	M	Type II E&M Lead Signaling. Customer at POT or customer's end user at POT originates on M Lead.	
EC -		Type III E&M signaling at customer POT	
EX -	A	tandem channel unit signaling for loop start or ground start and customer supplies open end (dial tone, etc.) functions.	
EX -	B	tandem channel unit signaling for loop start or ground start and customer supplies closed end (dial pulsing, etc.) functions.	
GO -		ground start loop signaling - open end function by customer or customer's end user	
GS -		ground start loop signaling - closed end function by customer or customer's end user	

Issued: OCT 1 1991

Effective:

Advice No. 1599

Issued by
R. C. Blanz
President

RECEIVED
OCT 1 1991
69

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS (Cont'd)

<u>Code</u>	<u>Option</u>	<u>Definition</u>
LA	-	end user loop start loop signaling - Type A OPS registered port open end
LB	-	end user loop start loop signaling - Type B OPS registered port open end
LC	-	end user loop start loop signaling - Type C OPS registered port open end
LO	-	loop start loop signaling - open end function by customer or customer's end user
LR	-	20 Hz automatic ringdown interface at customer with Utility provided PLAR
LS	-	loop start loop signaling - closed end function by customer or customer's end user
NO	-	no signaling interface, transmission only
PG	-	program transmission - no dc signaling
	- 1	nominal frequency from 50 to 15000 Hz
	- 3	nominal frequency from 200 to 3500 Hz
	- 5	nominal frequency from 100 to 5000 Hz
	- 8	nominal frequency from 50 to 8000 Hz
PR	-	protective relaying ¹
RV	- 0	reverse battery signaling, one way operation, originate by customer
	- T	reverse battery signaling, one way operation, terminate function by customer or customer's end user
SF	-	single frequency signaling with VF band at either customer POT or customer's end user POT
TF	-	telephotograph interface

(D)

(D)


NOTE 1: Available only for the transmission of audio tone protective relaying signals used in the protection of electric power systems during fault conditions.

Issued: NOV 19 1992

Issued by
R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. 1637



ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES


15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.1 GLOSSARY OF CHANNEL INTERFACE CODES AND OPTIONS (Cont'd)

<u>Code</u>	<u>Option</u>	<u>Definition</u>
TV	-	television interface
	- 1	combined (diplexed) video and one audio signal
	- 2	combined (diplexed) video and two audio signals
	- 5	video plus one (or two) audio 5 kHz signal(s) or one (or two) two wire
	- 15	video plus one (or two) audio 15 kHz signal(s)

Issued: **MAR 25 1987**
Effective: **APR 1 1987**
Advice No. **1459**

Issued by
R. K. Van Allen
President

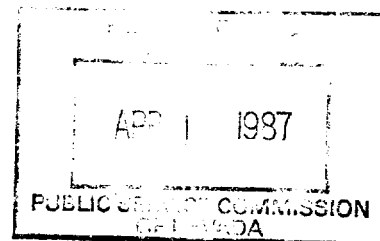

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.2 IMPEDANCE

The nominal reference impedance with which the channel will be terminated for the purpose of evaluating transmission performance:

<u>Value (ohms)</u>	<u>Code(s)</u>
110	0
150	1
600	2
900	3 ¹
135	5
75	6
124	7
Variable	8
100	9


NOTE 1: For those interface codes with a 4-wire transmission path at the customer designated POT, rather than a standard 900 ohm impedance, the code (3) denotes a customer provided transmission equipment termination. Such terminations were provided to customers in accordance with the F.C.C. Docket No. 20099 Settlement Agreement.

Issued: **MAR 25 1987**

Issued by
R. K. Van Allen
President

Effective: APR 1 1987

Advice No. **1459**

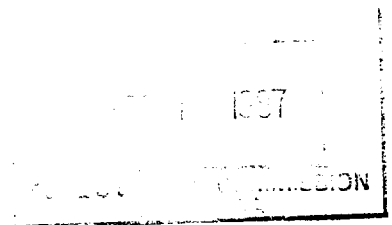

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.3 DIGITAL HIERARCHY CHANNEL INTERFACE CODES (4DS)

Customers selecting the multiplexed four-wire DSX-1 or higher facility interface option at the customer designated premises will be requested to provide subsequent system and channel assignment data. The various digital bit rates in the digital hierarchy employ the channel interface code 4DS8, 4DS0 or 4DS6 plus the speed options indicated below:

<u>Interface Code and Speed Option</u>	<u>Nominal Bit Rate (Mbps)</u>	<u>Digital Hierarchy Level</u>
4DS8-15	1.544	DS1
4DS8-31	3.152	DS1C
4DS0-63	6.312	DS2
4DS6-44	44.736	DS3
4DS6-27	274.176	DS4

(L)
|
(L)
|
(D)
|
(D)


Material previously on this page has been moved to Page 26.

Issued: **NOV 19 1992**

Issued by
R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. **1637**

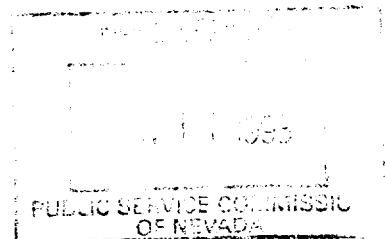

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.4 SERVICE DESIGNATOR/NETWORK CHANNEL CODE CONVERSION TABLE

The purpose of this table is to show the relationship between the service designator codes (e.g. VGC, MT2, etc.) and the network channel codes that are used for:

<u>Service Designator Code</u>	<u>Network Channel Code</u>
VGC	LQ
VGW	SE
VG1	LB
VG2	LC
VG3	LD
VG4	LE
VG5	LF
VG6	LG
VG7	LH
VG8	LJ
VG9	LK
VG10	LN
VG11	LP
VG12	LR
APC	PQ
AP1	PE
AP2	PF
AP3	PJ
AP4	PK
TVC	TQ
TV1	TV
TV2	TW
DA1	XA

(L)
|
(L)

(D)
(D)


Material on this page has been moved from Page 25.

Issued: NOV 19 1992

Issued by
R. C. Blanz
President and Chief Executive Officer

Effective:

Advice No. 1637

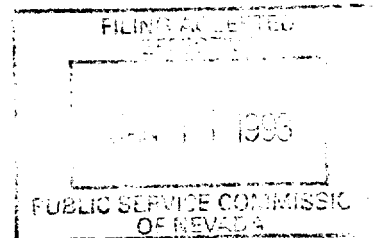

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.4 SERVICE DESIGNATOR/NETWORK CHANNEL CODE CONVERSION TABLE (Cont'd)

<u>Service Designator Code</u>	<u>Network Channel Code</u>
DA2	XB
DA3	XG
DA4	XH
HCO	HS
HCL	HC
HCLC	HD
HC2	HE
HC3	HF
HC4	HG

(L)
|
(L)
|
(D)
|
(D)


Material previously on this page has been relocated to Page 29.

Issued: **NOV 19 1992**

Issued by
R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. **1637**

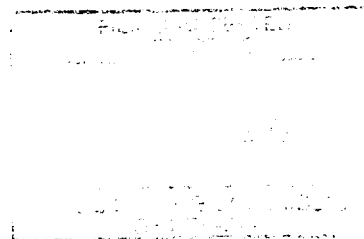

Nevada Bell
645 E. Plumb Lane, Reno, Nevada
Tariff P.S.C.N. No. C15-A

1st Revised Page No. 28

Cancelling Original Page No. 28

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

(D)

This page left blank intentionally.

(D)

Issued: NOV 19 1992

Issued by
R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. **1637**

REGISTRY OF PUBLIC UTILITIES
PUBLIC SERVICE COMMISSION
OF NEVADA

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES

The following tables show the channel interface codes (CIs) which are compatible:

(L)
 |
 (L)

C. VOICE GRADE

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
2AB2	2AC2	2DB2	2DA2	2LR2	2LR2
2AB3	2AC2	2DB3	2DA2	2LR3	2LR2
2CT3	2DY2	2DX3	2LA2	2LS	2GS
	4DS8 ¹		2LB2		2LS
	4DX2		2LC2		4GS
	4DX3		2LO3		4LS
	4DY2		2LS2		
	4EA2-E		2LS3	2LS2	2LA2
	4EA2-M				2LB2
	4SF2	2G02	2GS2		2LC2
	4SF3		2GS3		
	6DX2			2LS3	2LA2
	6DY2	2G03	2GS2		2LB2
	6DY3		2GS3		2LC2
	6EA2-E				
	6EA2-M	2GS	2GS	2N02	2DA2
	6EB2-E		2LS		2N02
	6EB2-M		4GS		
	6EB3-E		4LS	2N03	2N02
	8EB2-E				2PR2
	8EB2-M	2L02	2LS2		
	8EC2		2LS3	2TF3	2TF2
	9DY2				
	9DY3	2L03	2LS2		
	9EA2		2LS3		
	9EA3				


NOTE 1: See 15.3.3 preceding for explanation.
 Material on this page has been relocated from Page 27.

Issued: NOV 19 1992

Issued by
 R. C. Blanz

Effective: President and Chief Executive Officer

Advice No. 1637

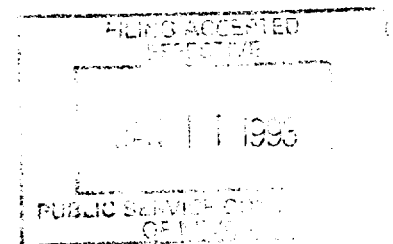

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>		
4AB2	2AC2	4DS8-1	2AC2	4DS8-1	4DG2	(C)
	4AB2		2DA2		4LR2	
	4AC2		2DY2		4LS2	
	4SF2		2G02		4NO2	
			2G03		4PR2	
4AB3	2AC2		2GS2		4RV2-T	
	4AC2		2GS3		4SF2	
	4AC2		2LA2		4SF3	
			2LB2		4TF2	
4AC2	2AC2		2LC2		6DA2	
	4AC2		2L02		6DY2	
			2L03		6DY3	
4DA2	4DA2		2LR2		6EA2-E	
			2LS2		6EA2-M	
4DB2	2DA2		2LS3		6EB2-E	
	2NO2		2NO2		6EB2-M	
	2PR2		2PR2		6GS-2	
	4DA2		2RV2-T		6LS2	
	4DB2		2TF2		8EB2-E	
	4NO2		4AC2		8EB2-M	
	4PR2		4DA2		9DY2	
	6DA2		4DE2		9DY3	
			4DX2		9EA2	
4DD3	2DE2		4DX3		9EA3	
	4DE2		4DY2			
			4EA2-E			
			4EA2-M			


NOTE 1: See 15.3.3 preceding for explanation.

Issued: JAN 30 1989

Issued by
 D. R. Mulkey
 President

Effective:

Advice No. 1526



ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
4DX2	2DY2	4DX2	8EB2-E	4DX3	6DY2
	2LA2		8EB2-M		6DY3
	2LB2		9DY2		6EA2-E
	2LC2		9DY3		6EA2-M
	2LO3		9EA2		6EB2-E
	2LS2		9EA3		6EB2-M
	2LS3				6LS2
	2RV2-T	4DX3	2DY2		8EB2-E
	2RX2		2LA2		8EB2-M
	4DY2		2LB2		9DY2
	4DA2-E		2LC2		9DY3
	4EA2-M		2LO3		9EA2
	4LS2		2LS2		9EA3
	4RV2-T		2LS3		
	4SF2		2RV2-T	4DY2	2DY2
	4SF3		4DX2		4DY2
	6DY2		4DX3		
	6DY3		4DY2		
	6EA2-E		4EA2-E		
	6EA2-M		4EA2-M		
	6EB2-E		4LS2		
	6EB2-M		4RV2-T		
	6LS2		4SF2		
			4SF3		

(C)

(C)


(C)

Issued: JAN 30 1989

Effective:

Advice No. 1526

Issued by
 D. R. Mulkey
 President

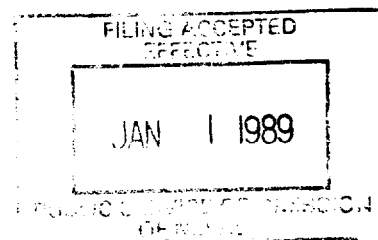

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)


<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>		
4EA2-E	2DY2	4EA3-E	2DY2	4G02	2G02	
	4DY2		4DY2		2G03	
	4EA2-E		4EA2-E		2GS2	
	4EA2-M		4EA2-M		2GS3	
	4SF2		4SF2		4GS2	
	6DY2		6DY2		4SF2	
	6DY3		6DY3		6GS2	
	6EB2-E		6EA2-E			
	6EB2-M		6EA2-M		4G03	2G02
	8EB2-E		6EB2-E			2GS2
	8EB2-M		6EB2-M			2GS3
	9DY2		8EB2-E			4GS2
	9DY3		8EB2-M			4SF2
			9DY2			6GS2
			9DY3			
4EA2-M	2DY2		9DY2			
	4DY2		9EA2			
	4EA2-M		9EA3	4GS	2GS	
	4SF2				2LS	
	6DY2				4GS	
	6DY3				4LS	
	6EB2-E					
	6EB2-M					
	8EB2-E					
	8EB2-M					
	9DY2					
	9DY3					

Issued: **MAR 25 1967**

Effective: **APR 1 1967**

Advice No. **T 459**

Issued by
 R. K. Van Allen
 President

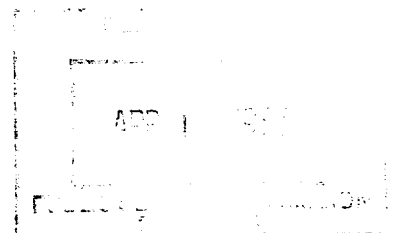

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)


<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
4L02	2LS2 2LS3 4LS2 4SF2 6LS2	4LS3	2LA2 2LB2 2LC2 2L02 2L03 4SF2	4SF2	2L03 2LR2 2LS2 2LS3 2RV2-T 4AC2 4DY2
4L03	2LS2 2LS3 4LS2 4SF2 6LS2	4N02	2DA2 2DE2 2N02 4DA2 4DE2 4NO2 6DA2		4LS2 2RV2-T 4SF2 6DY2 6DY3 6GS2 9DY2 9DY3
4LR2	2LR2 4LR2 4SF2		2RV2-T 4RV2-T 4SF2		
4LR3	2LR2 4LR2 4SF2	4RV2-0		4SF3	2DY2 2G03 2GS2 2GS3 2LA2 2LB2 2LC2 2L03 2LR2
4LS	2GS 2LS 2GS 2LS	4SF2	2AC2 2DY2 2GS2 2GS3 2LA2 2LB2 2LC2		
4LS2	2LA2 2LB2 2LC2 2L02 2L03				

Issued: **MAR 25 1987**

Effective: **APR 1 1987**

Advice No. **1459**

Issued by
 R. K. Van Allen
 President

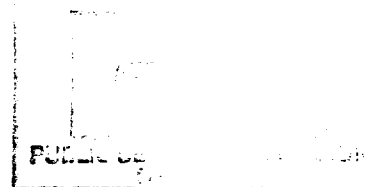

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)


<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
4SF3	2LS2	6DA	4DA2	6DY3	2DY2
	2LS3		6DA2		4DY2
	2RV2-T				6DY2
	4DY2	6DX2	2DY2		6DY3
	4EA2-E		4DY2		
	4EA2-M		4EA2-E	6EA2-E	2AC2
	4GS2				
	4LR2		4EA2-M		2DY2
	4LS2		4SF2		2LA2
	4RV2-T		6DY2		2LB2
	4SF2		6DY3		2LC2
	4SF3		6EA2-E		2LO3
	6DY2		6EA2-M		2LS2
	6DY3		6EB2-E		2LS3
	6EB2-E		6EB2-M		2RV2-T
	6EB2-M		8EB2-E		4AC2
	6GS2		8EB2-M		4DY2
	6LS2		9DY2		4EA2-E
	9DY2		9DY3		4EA2-M
	9DY3		9EA2		4LS2
	9EA2		9EA3		4RV2-T
	9EA3				4SF2
		6DY2	2DY2		4SF3
4TF2	2TF2		4DY2		6DY2
	4TF2		6DY2		6DY3
					6EA2-E
					6EA2-M

Issued: ~~MAR 25~~ 1987

Effective: APR 1 1987

Advice No: 7459

Issued by
 R. K. Van Allen
 President

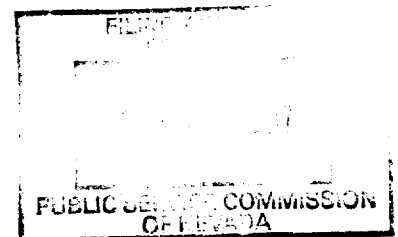

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)


15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
6EA2-E	6EB2-E	6EA2-M	6DY2	6EB3-2	2DY2
	6EB2-M		6DY3		4DY2
	6LS2		6EA2-M		4EA2-E
	8EB2-E		6EB2-E		4EA2-M
	8EB2-M		6EB2-M		4SF2
	9DY2		6LS2		6DY2
	9DY3		8EB2-E		6DY3
			8EB2-M		6EA2-E
6EA2-M	2AC2		9DY2		6EA2-M
	2DY2		9DY3		8EB2-E
	2LA2				8EB2-M
	2LB2	6EB2-E	2DY2		9DY2
	2LC2		4DY2		9DY3
	2LO3		4SF2		9EA2
	2LS2		6DY2		9EA3
	2LS3		6DY3		
	2RV2-T		6EB2-E	6EX2-A	2GS2
	4AC2		6EB2-M		2GS3
	4DY2		9DY2		2LS2
	4EA2-E		9DY3		2LS3
	4EA2-M				4GS2
	4LS2	6EB2-M	2DY2		4LS2
	4RV2-T		4DY2		4SF2
	4SF2		4SF2		6GS2
	4SF3		6DY2		6LS2
			6DY3		
			6EB2-M		
			9DY2		
			9DY3		

Issued: **MAR 25 1987**
 Effective: **APR 1 1987**
 Advice No. **1459**

Issued by
 R. K. Van Allen
 President

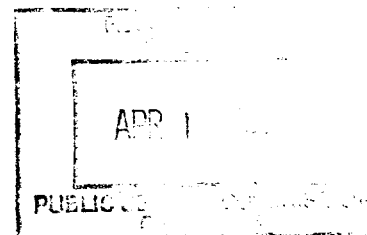

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)


15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)

<u>Compatible CIs</u>	<u>Compatible CIs</u>	<u>Compatible CIs</u>
6EX2-B	2G03 2LA2 2LB2 2LC2 2LO2 2LO3 2LR2 4LR2 4SF2	8EB2-E 2AC2 2DY2 2LA2 2LB2 2LC2 2LO3 2LS2 2LS3 2RV2-T 4AC2 4DY2 4LS2 4RV2-T 4SF2 4SF3 6DY2 6DY3 6EB2-E 6EB2-M 6LS2 8EB2-E 8EB2-M 9DY2 9DY3
6G02	2G02 2GS2 2GS3 4GS2 4SF2 6GS2	8EB2-M 2AC2 2DY2 2LA2 2LB2 2LC2 2LO3 2LS2 2LS3 2RV2-T 4AC2 4DY2 4LS2 4RV2-T 4SF2 4SF3 6DY2 6DY3 6EB2-E 6EB2-M 6LS2 8EB2-M 9DY2 9DY3
6L02	2LS2 2LS3 4LS2 4SF2 6LS2	
6LS2	2LA2 2LB2 2LC2 2LO2 2LO3 4SF2	

Issued: **MAR 25 1987**
Effective: **APR 1 1987**
Advice No. **1459**

Issued by
R. K. Van Allen
President

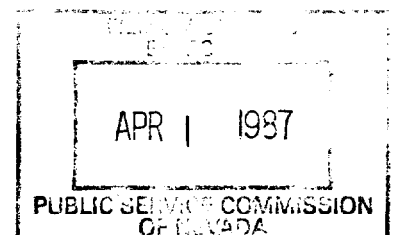

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)


15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

C. VOICE GRADE (Cont'd)

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
8EC2	2DY2	9DY2	2DY2	9EA3	2DY2
	4DY2		4DY2		4DY2
	4EA2-E		6DY2		4EA2-E
	4EA2-M		6DY3		4EA2-M
	4SF2		9DY2		6DY2
	6DY2				6DY3
	6DY3	9DY3	2DY2		6EA2-E
	6EA2-E		4DY2		6EA2-M
	6EA2-M		6DY2		6EB2-E
	6EB2-E		6DY3		6EB2-M
	6EB2-M		9DY2		8EB2-E
	8EB2-E		9DY3		8EB2-M
	8EB2-M				9DY2
	9DY2	9EA2	2DY2		9DY3
	9DY3		4DY2		9EA3
	9EA2		4EA2-E		
	9EA3		4EA2-M		
			6DY2		
			6DY3		
			6EA2-E		
			6EA2-M		
			6EB2-E		
			6EB2-M		
			8EB2-E		
			8EB2-M		
			9DY2		
			9DY3		
			9EA2		
			9EA3		

Issued: ~~MAR 25 1987~~
Effective: APR 1 1987
Advice No. 1459

Issued by
R. K. Van Allen
President

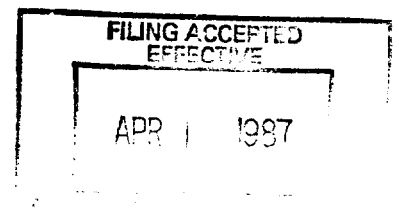

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

(D)

D. PROGRAM AUDIO


<u>Compatible CIs</u>		<u>Compatible CIs</u>	
2PG2-1	2PG1-1 2PG2-1	4DS8-15E	2PG1-3 2PG2-3
2PG2-3	2PG1-3 2PG2-3	4DS8-15F	2PG1-5 2PG2-5
2PG2-5	2PG1-5 2PG2-5	4DS8-15G	2PG1-8 2PG2-8
2PG2-8	2PG1-8 2PG2-8	4DS8-15H	2PG1-1 2PG2-1

Issued: JAN 30 1989

Effective:

Advice No. 1526

Issued by
D. R. Mulkey
President

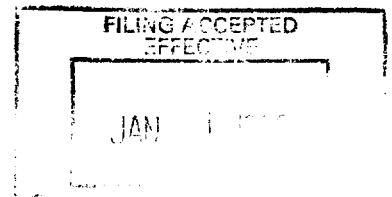

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES


15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)
 15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

E. VIDEO

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
2TV6-1	4TV6-15 4TV7-15	4TV6-5	4TV6-5 4TV7-5	6TV6-5	6TV6-5 6TV7-5
2TV6-2	6TV6-15 6TV7-15	4TV6-15	4TV6-15 4TV7-15	6TV6-15	6TV6-15 6TV7-15
2TV7-1	4TV6-15 4TV7-15	4TV7-5	4TV6-5 4TV7-5	6TV7-5	6TV6-5 6TV7-5
2TV7-2	6TV6-15 6TV7-15	4TV7-15	4TV6-15 4TV7-15	6TV7-15	6TV6-15 6TV7-15

Issued: **MAR 25 1987**
 Effective: **APR 1 1987**
 Advice No. **459**

Issued by
 R. K. Van Allen
 President

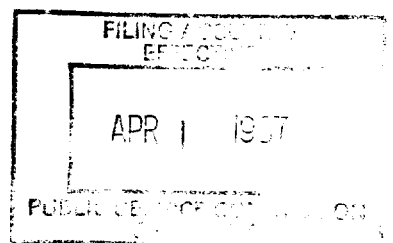

ACCESS SERVICE

C15-A. INTERFACE GROUPS, TRANSMISSION SPECIFICATIONS AND CHANNEL INTERFACES

15.3 SPECIAL ACCESS CHANNEL INTERFACE AND NETWORK CHANNEL CODES (Cont'd)

15.3.5 COMPATIBLE CHANNEL INTERFACES (Cont'd)

F. DIGITAL DATA

<u>Compatible CIs</u>		<u>Compatible CIs</u>		<u>Compatible CIs</u>	
4DS8-15	4DS8-15 ¹	4DU5-24	4DU5-24	4DU8-56	4DU5-56
	4DU5-24				
	4DU5-48	6DU5-48	6DU5-48	6DU5-24	6DU5-24
	4DU5-56				
	4DU5-96	4DU5-96	4DU5-96	6DU5-48	6DU5-48
	6DU5-24				
	6DU5-48			6DU5-56	6DU5-56
	6DU5-96				
				6DU5-96	6DU5-96

G. HIGH CAPACITY

<u>Compatible CIs</u>		<u>Compatible CIs</u>	
4DS0-63	4DS0-63		
	4DU8-A,B or C	4DS8-15J	4DU8-A
	6DU8-A,B or C		6DU8-A
4DS6-27	4DS6-27	4DS8-15K	4DU8-B
	4DU8-A,B or C		4DU8-C
	6DU8-A,B or C		6DU8-B
			6DU8-C
4DS6-44	4DS6-44	4DS8-31	4DS8-31
	4DU8-A,B or C		4DU8-A,B or C
	6DU8-A,B or C		6DU8-A,B or C
4DS8-15	4DS8-15 ¹	4DU8-A,B or C	4DU8-A,B or C
	4DU8-B		
	6DU8-8		

NOTE 1: Available only as a cross connect of two individual channels of 1.544 Mbps facilities at a Utility hub.

Issued: ~~MAR 25 1987~~
Effective: APR 1 1987
Advice No. 7450

Issued by
R. K. Van Allen
President

FILING OFFICE
APR 1 1987