TARIFF DISTRIBUTION

FILE PACKAGE NO.: SC-26-0001

DATE: November 20, 2025

STATE: SOUTH CAROLINA

TYPE OF DISTRIBUTION:

Pending

Purpose: Increase Business Analog Private Line (API)


Services Monthly Rates

TARIFF SECTION	PAGE NUMBER	PAGE REVISI
Н103	24	0007
Н103	25	8000
Н103	26	0007

SC-26-0001 EFFECTIVE: January 3, 2026

B103. OBSOLETE SERVICE OFFERINGS - CHANNELS

B103.12 Rates and Charges

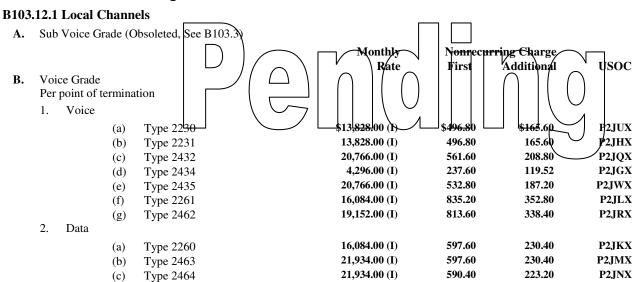

B103.12.2 Non-Wire Center Connected Channels (Obsoleted, See Section B103.3)

B103.12.3 Interoffice Channels¹

	••••••••••••••••••••••••••••••••••••••		Fixed Monthly Rate	Monthly Rate Per Mile	Nonrecurring Charge	USOC
A.	Fixed and Mileage	Charges applicable, per ch	annel			
	 Sub Voice Gra 	ade - Series 1000 (Obsolet	ed, See Section B103.3)			
	Voice Grade S	Service - Series 2000				
	(a)	1 thru 8 Miles	\$19,972.00 (I)	\$1,495.00 (I)	\$151.20	3LBBS
	(b)	9 thru 25 Miles	19,972.00 (I)	1,495.00 (I)	151.20	3LBBS
	(c)	Over 25 Miles	19,972.00 (I)	1,495.00 (I)	151.20	3LBBS

Note 1: For method of determining mileage, see B103.11.3.A.

SC-26-0001 EFFECTIVE: January 3, 2026

B103. OBSOLETE SERVICE OFFERINGS - CHANNELS

B103.12 Rates and Charges (Cont'd)

B103.12.4 Optional Features and Functions

Bridging Bridging charges are applicable where more than two Local Channels, or one or more Local Channels and more than one Interoffice Channel, or more than one Local Channel and one Interoffice Channel are bridged or hubbed at the same wire center. No additional bridging charges are applicable for Series 1000, Types 1204 and 1205. Nonrecurring Monthly Charge Rate Voice Grade Bridges (Series 2000) Voice Bridging (1) Per Port \$56.16 Two-Wire (Type 2230) \$5,260.00 (I) BO9 (a) 6,874.00 (I) **BO**9 (b) Four-Wire (Type 2435) 56.16 b. Data Bridging (1) Per Port Four-Wire (Types 2463 and 2464) 61.92 9,928.00 (I) BQ9 (a) Telemetry and Alarm Bridging - Split Band, Active Bridging Common Equipment, per central office First bridging shelf, capacity of 48 365.00 19,840.00 (I) XW1 two-wire connections (b) Additional bridging shelf, capacity of 330.00 19,840.00 (I) XW2 56 two-wire connections installed subsequent to the first bridging shelf 10,039.00 (I) Additional bridging shelf, capacity of 205.00 XW8 (c) 56 two-wire connections installed at the same time as the first bridging shelf (2) Channel connections, per channel connected 40,00 XW3 Remote station channel connection 775.00 (T) (b) Mid-link channel connection, first 47.00 1,968.00 (I) XW4 channel 47.00 1,968.00 (I) XW5 Mid-link channel connection, (c) subsequent channels

B. Signaling Arrangements

Signaling arrangements are provided at the customer's option to arrange channels for suitable signaling. Signaling is required on all off-premises extension channels and tie line channels associated with PBX (or similar) systems.

Per local channel

		Monthly	None		
		Rate	Initial	Subsequent	USOC
(a)	Ringdown - Manual	\$3,199.00 (I)	\$60.48	\$309.60	SL3
(b)	Ringdown - Automatic	3,955.00 (I)	21.60	106.56	SL5
(c)	E & M Type	3,955.00 (I)	61.92	273.60	SLM
(d)	Type A (0-199 ohms)	2,332.00 (I)	60.48	201.60	SAL
(e)	Type B (200-899 ohms)	2,332.00 (I)	59.04	201.60	SAU
(f)	Type C (900 or more ohms)	775.00 (I)	15.84	201.60	SAY

Monthly

Nonrecurring Charge

SC-26-0001 EFFECTIVE: January 3, 2026

B103. OBSOLETE SERVICE OFFERINGS - CHANNELS

B103.12 Rates and Charges (Cont'd)

B103.12.4 Optional Features and Functions (Cont'd)

C. Conditioning (Voice Grade Services)

1.	Conditioning provides more specific transmission characteristics for data services. There are two types of C-conditioning
	and one type of D-conditioning, each with different technical specifications. C-Type conditioning controls attenuation
	distortion and envelope delay distortion. D-Type conditioning controls the signal to C-notched noise ratio and
	intermodulation distortion.
	Conditioning is charged for on a per Local Channel basis for two-point and multi-point service. For two-point services
	the parameters apply to each service. For multipoint services the parameters apply to any path between any two service
	points.

2. The types and description of the available conditioning options are as follows:

Type Conditioning

Frequency Response Specification

Spec

		Specification
C1 (two-point or multipoint)	300-2700 Hz,	1000-2400 Hz, less
	-2dB to $+6dB$.	than 1000 microseconds
	1000-2400 Hz,	
	-1dB to $+3$ dB.	
	300-3000 Hz,	
	-3dB to $+12dB$.	
C2 (two-point or multipoint)	300-3000 Hz,	1000-2600 Hz, less
	-2dB to $+6dB$.	than 500 microseconds
	500-2800 Hz,	600-2600 Hz, less
	-1dB to $+3$ dB.	than 1500 microseconds
		500-2800 Hz, less
		than 3000 microseconds
		Non-Linear Distortion

		Non-Linear	Distortion
	C-Notched Noise	2nd Order	3rd Order
		Distortion	Distortion
D1 (two-point)	Noise level 28dB	35dB below	40dB below
_	below signal level	signal level	signal level

- 3. When a channel is equipped with Type D1 conditioning and is utilized for voice communications, the Company does not undertake to represent that the channel will be suitable for such voice transmission.
- 4. C-Type Conditioning
 - a. C-Type Conditioning is available for Types 2463 and 2464.

		Monthly	Nonrecurring Charge		
		Rate	Initial	Subsequent	USOC
	(1) C-Types of Conditioning per local channel				
	(a) C1-Type	\$775.00 (I)	\$14.40	\$122.40	P2W
	(b) C2-Type	775.00 (I)	31.68	135.36	P3W
5.	D-Type Conditioning				
	a. D-Type Conditioning is available for Types 2463	and 2464.			
	(1) D-Type Conditioning per local channel				
	(a) D1-Type	775.00 (I)	21.60	128.16	QHA